


ODORANT VAPOR FLARES





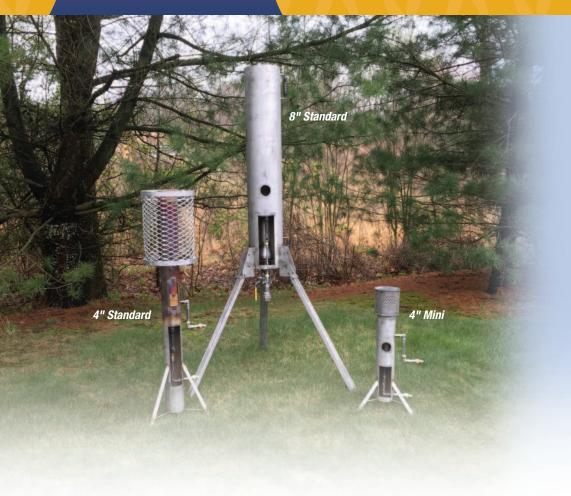

Odorant Vapor Flares

Used to safely burn off odorant vapors contained in natural gas, propane or butane that are under pressure in cylinders, tanks and similar vessel, without releasing foul odorant sulfur smells to the atmosphere.

4" Mini Flare

- Perfect for maintaining optimum pressure on odorizer expansion tanks and smaller bulk tanks.
- Low profile for convenience and portability.

4" Standard Flare

- Ideal for a wide range of applications.
- Increased capacity over the 4" mini flare while maintaining ease of portability.

8" Standard Flare

- Increased capacity for larger applications.
- Folding legs for portability.

Optional Swagelok™ hose & fitting package and Pelican™ vapor resistant carrying case available. (Recommended if not already in possession)



ODORANT VAPOR FLARES

Odorant Vapor Flare Specifications:

	4" Mini	4" Standard	8" Standard
Height (ft)	2.0	4.0	6.0
Pilot Orifice	#72 (0.025")	#72 (0.025")	#72 (0.025")
Vapor Flow Opening	1/4" Tubing	1/4" Tubing	1/4" Tubing
Vapor Connection	1/4" (female quick connect)	1/4" (female quick connect)	1" NPT
Pilot Fuel Connection	1/2" (female quick connect)	1/2" (female quick connect)	1/2" (female quick connect)
Construction	316 Stainless Steel / Aluminum	316 Stainless Steel / Aluminum	316 Stainless Steel / Aluminum
Recommended Tank Application	0-60 gallon	0-250 gallon	0-2000 gallon

Optional Equipment:

- Swagelok[™] hose & fitting package includes:
 - PTFE Stainless Braided 50' Hose for Vapor Line
 - Nylon 50' Hose for Pilot Supply
 - Stainless Steel Valves and Fittings
- Pelican[™] vapor resistant carry case for hose & fitting package



Optional Swagelok™ Hose and Fitting Package and Pelican™ Carry Case